


# ADVERC GALVANIC ISOLATOR (A936).

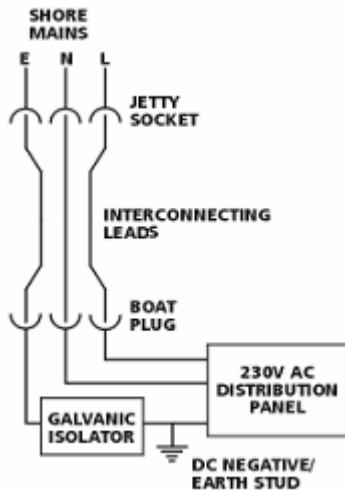

## TEST PROCEDURE

This should be carried out every six months.

1. Unplug any connections to the shore power before commencing the test.
2. Remove both leads from the Galvanic Isolator.
3. Using a multimeter, set to the diode test function, test continuity across both terminals using positive and negative probes.
4. Note the reading on the display.
5. Short both terminals with a metal object such as a small screwdriver, to discharge an internal capacitor.
6. Repeat 3, with the multimeter probes reversed.
7. Note the reading on the display. This should be the same as 4 give or take a few digits e.g. 1032-1029, 783-786.
8. Re-connect the original earth leads to the Galvanic Isolator terminals, as before.
9. The readings can vary, depending on the multimeter used. For a successful test, it is essential that both readings, with the probes reversed, are virtually the same.

Thank you for purchasing one of our Galvanic Isolators.

<b>PART NO</b>	<b>A936</b>
<b>WORKING VOLTAGE</b>	<b>SHOREPOWER: 115V AC / 230V AC 50 – 60Hz</b>
<b>SHOREPOWER RATING</b>	<b>SUITABLE FOR USE WITH RCD PROTECTED SHOREPOWER OUTLETS FROM 10AMPS – 50 AMPS</b>
<b>FIXING</b>	<b>4 POINT FIXING (5mm HOLE)</b>
<b>FEATURES</b>	<b>FULLY SEALED CONSTRUCTION CONFORMS TO EC/73/23/EEC &amp; 89/336/EEC</b>

**ADVERC BM Ltd., 245 Trysull Road, Merry Hill, Wolverhampton, West Midlands WV3 7LG**

Tel: 01902 380494 Fax: 01902 380435 e-mail: techsales@adverc.co.uk www.adverc.co.uk

Registered in England No. 1932971 VAT Registered No. 431 3431 93